

GelatoShow

Gelato

120 • 170 • 220

Gelato cabinets with ventilated refrigeration with double airflow for a perfect uniformity of temperature. One piece body with ecological polyurethane insulation (HCFC & HFC free), foamed with CO₂. Tempered glass structure. Front and side panels insulated with anti-fog ventilation system with anti-scratch treatment.



Alluminio Brillante
RAL 9006
(STANDARD)



Arancio Perlato
RAL 2013

	REFRIGERANT	R404A
	ENERGY SAVING	Led + EC Fan motor
	INSTALLATION	<ul style="list-style-type: none"> • Plug-In (standard) • Remote (special order)
	CABINET CAPACITY RANGE	-4 / 35,6 °F
	DEFROST	Reverse cycle
	CLIMATIC CLASS	4 [86 °F / 55% R.H.]
	REFRIGERATION	Ventilated
	CLOSING SYSTEM	Sliding glass

STANDARD MODEL INCLUDES:

- Operator side closure with sliding glass
- Work top in bright stainless steel
- Electronic control panel
- Adjustable feet
- Wheel kit for easy handling
- Led lighting
- Side panel [2] - Alluminio Brillante RAL 9006
- Front panel Alluminio Brillante RAL 9006


COLORS

Beige Perlato RAL 1035	Arancio Perlato RAL 2013	Giallo Metallizzato 445	Alluminio Brillante RAL 9006	Grigio Metallizzato 440	Azzurro Metallizzato 407 BL2014	Blu Notte Perlato RAL 5026	Rosso Titanite 567	Blu Chiaro Metallizzato 407 BT5014
------------------------------	--------------------------------	-------------------------------	------------------------------------	-------------------------------	---------------------------------------	----------------------------------	--------------------------	--



Wheel kit for easy handling

GelatoShow
Gelato

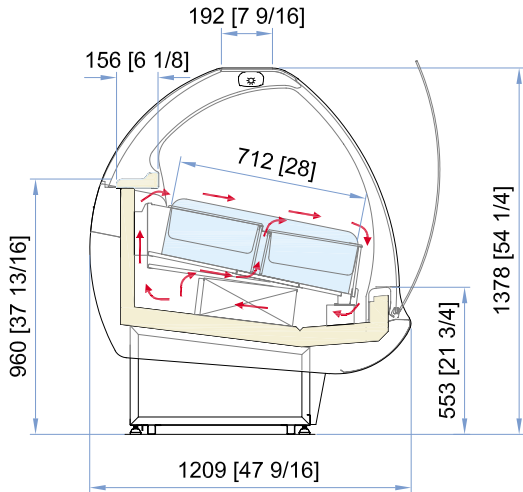

NOTE: The model does not include polycarbonate containers.


TECHNICAL FEATURES			120	170	220
External dimensions	Lenght	inch	44 1/2	64	83 7/16
Capacity	Gross / Net	liters	787 / 147	1158 / 216	1529 / 285
Weight	Net	lb	753,9	959	1159,6
Refrigerant			R404A		
Cabinet capacity range		°F	-4 / +35.6		
Product temperature		°F	3.2 / 6.8		
Compressor	Type / Q.ty		Semi Hermetic / 1		
Defrost			Reverse cycle		

POLICARBONATE CONTAINERS			120	170	220
5 lt [Standard]	14 3/16 x 6 1/2 x 4 23/32		12	18	24
5 lt [Large]	14 3/16 x 9 27/32 x 3 5/32		8	12	16

ELECTRICAL DATA			120	170	220
Power supply			220 / 60 / 3 pole - 4 wire grounding		
Nema plug			15-30P		
Electrical input	A		11	13	16

Technical info refers to models with built-in air cooled condensing unit.

PACKAGING STANDARD [Wooden cage]			120	170	220
External dimensions	Lenght	inch	54,9	74,4	93,9
	Depth x Height	inch	54,1 x 62,9		
Gross weight		lb	617	882	1.146

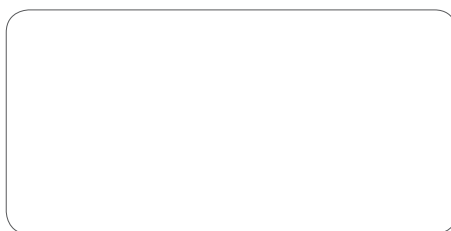

Dealer

Carpigiani North America ISA S.p.A.

3760 Industrial Drive
Winston-Salem
NC 27105
www.carpigiani-usa.com

Via Madonna di campagna, 123
06083 Bastia Umbra (PG)
Italy
T. +39 075 801 71
F. +39 075 800 09 00
E. customerservice@isaitaly.com
www.isaitaly.com