









SuperShow Gelato

120 • 170 • 220

Gelato cabinets with ventilated refrigeration with double airflow for a perfect uniformity of temperature. One piece body with ecological polyurethane insulation (HCFC & HFC free), foamed with CO₂. Tempered glass structure. Side panels in bright stainless steel.



| | | |
|---|-------------------------------|--|
|  | REFRIGERANT | R404A |
|  | ENERGY SAVING | Led + EC Fan motor |
|  | INSTALLATION | <ul style="list-style-type: none"> • Plug-In (standard) • Remote (special order) |
|  | CABINET CAPACITY RANGE | -4 / 35,6 °F |
|  | DEFROST | Reverse cycle |
|  | CLIMATIC CLASS | 4 [86 °F / 55% R.H.] |
|  | REFRIGERATION | Ventilated |
|  | CLOSING SYSTEM | Sliding doors |

STANDARD MODEL INCLUDES:

- Operator side closure with sliding glass
- Work top in bright stainless steel
- Electronic control panel
- Adjustable feet
- Led lighting
- Side panel (2) - Stainless steel
- Front panel Stainless steel

COLORS

SIDE PANEL - FRONT PANEL [Standard]

Stainless steel



FRONT PANEL [Special order]


Rosso Wengé
lacca cinese




Wheel kit for easy handling

SuperShow Gelato

H117

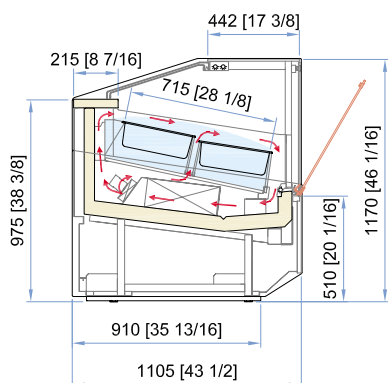

H135

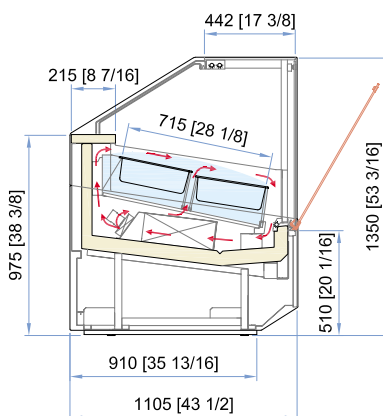

NOTE: The model does not included polycarbonate containers.

| TECHNICAL FEATURES | | | 120 | 170 | 220 |
|------------------------|-------------|------|-------------------|------------|------------|
| External dimensions | Lenght | inch | 46 2/3 | 66 1/3 | 85 1/16 |
| Capacity | Gross / Net | H117 | 685 / 147 | 1009 / 216 | 1332 / 285 |
| | | H135 | 824 / 147 | 1212 / 216 | 1600 / 285 |
| Weight | Net | H117 | 706 | 902 | 1.124 |
| | | H135 | 730 | 924 | 1.147 |
| Refrigerant | | | R404A | | |
| Cabinet capacity range | | °F | -4 / +35.6 | | |
| Product temperature | | °F | 3.2 / 6.8 | | |
| Compressor | Type / Q.ty | | Semi Hermetic / 1 | | |
| Defrost | | | Reverse cycle | | |

| POLICARBONATE CONTAINERS | | | 120 | 170 | 220 |
|--------------------------|-----------------------------|--|-----|-----|-----|
| 5 lt [Standard] | 14 3/16 x 6 1/2 x 4 23/32H | | 12 | 18 | 24 |
| 5 lt [Large] | 14 3/16 x 9 27/32 x 3 5/32H | | 8 | 12 | 16 |

| ELECTRICAL DATA | | | 120 | 170 | 220 |
|------------------|---|--|--------------------------------------|-----|-----|
| Power supply | | | 220 / 60 / 3 pole - 4 wire grounding | | |
| Nema plug | | | 15-30P | | |
| Electrical input | A | | 9 | | 16 |

Technical info refers to models with built-in air cooled condensing unit.

| PACKAGING STANDARD [Wooden cage] | | | 120 | 170 | 220 |
|----------------------------------|----------------|------|-------------|------|-------|
| External dimensions | Lenght | inch | 54,9 | 74,4 | 93,9 |
| | Depth x Height | | 54,1 x 62,9 | | |
| Gross weight | H117 | lb | 727 | 934 | 1.157 |
| | H135 | | 762 | 956 | 1.179 |



Dealer

Carpigiani North America ISA S.p.A.

3760 Industrial Drive
Winston-Salem
NC 27105
www.carpigiani-usa.com

Via Madonna di campagna, 123
06083 Bastia Umbra [PG]
Italy
T. +39 075 801 71
F. +39 075 800 09 00
E. customerservice@isaitaly.com
www.isaitaly.com